

Test Menu

<p>Thyroid</p> <p>Infectious Disease</p> <p>FT3 FT4 T3 T4 TSH Anti-Tg Anti-TPO Tg rT3 TRAb</p>	<p>Fertility</p> <p>Total β-HCG FSH LH Prolactin Estradiol TESTO PROG AMH Free testosterone* 17-OH PROG* SHBG*</p>	<p>Bone Metabolic</p> <p>Tumor marker</p> <p>CEA AFP CA125 CA15-3 CA19-9 Free PSA Total PSA NSE CYFRA 21-1 CA72-4 PG I PG II SCCA HE4 ProGRP CA50 CA242 PIVKA-II* AFP-L3%* Hp IgG* G-17*</p>	<p>Diabetes</p> <p>DM</p> <p>Insulin C-peptide</p>
<p>Liver Fibrosis</p> <p>Adrenal Function</p> <p>DHEA-S Cortisol ACTH</p>	<p>ToRCH</p> <p>Toxo IgG Toxo IgM Rubella IgG Rubella IgM CMV IgG CMV IgM HSV-1/2 IgG* HSV-1/2 IgM* HSV-1 IgG* HSV-2 IgG*</p>	<p>Anemia</p> <p>Growth Hormone</p> <p>GH* IGF-1*</p>	<p>EH</p> <p>Renin Aldosterone</p>
<p>DS Screening</p> <p>PAPP-A* Free β-HCG*</p>	<p>COVID-19</p> <p>SARS-COV-2 IgG SARS-COV-2 IgM SARS-COV-2S-RBD IgG SARS-COV-2 Neutralizing Antibody</p>	<p>Inflammation</p> <p>Procalcitonin IL-6 sCD14-ST</p>	<p>Hypertension</p>

*: Under development
**: Non-CE

CL-900i

Chemiluminescence Immunoassay Analyzer

Technical Specifications

General Information

Throughput Up to 180 tests/hour
Measurement Principle Micron superparamagnetic particles platform
With alkaline phosphatase (ALP) labeled reagents
And AMPPD substrate

Sample Assembly

Sample Feeder Continuous sample loading and offloading
Sample Positions 50
Sample Probe Steel probe, liquid level detection, clot detection, Horizontal and vertical collision protection
Sample Volume 10~200ul, with increment of 1 ul
Sample Dilution Automatic dilution with 1:2~1:40

Reagent Assembly

Reagent Disk 15 reagent positions, continuous loading, real-time mixing for magnetic particles
Cooling System 2~8 °C
Reagent Pack 50 tests/pack, 100 tests/pack
Reagent Scanning Built-in/External bar code reader
Reagent Probe Steel probe, liquid level detection, clot detection, Horizontal and vertical collision protection
Reagent Volume 20~200ul, with increment of 1 ul

Substrate System

Substrate Bottle 300/500 tests per bottle, bottom piercing
Substrate Loading Capable of continuous loading during testing
Substrate Heating Constant heating
Aspiration Volume 200ul

Magnetic Separation Unit

Separation Assembly 4-phase magnetic separation
Temperature Accuracy: 37±0.3 °C

Measurement and Reaction System

Detection Mode Photon counting
Signal Detector Photomultiplier (PMT) photo counter
PMT Calibration LED reference module
Incubation Positions 82
Temperature Accuracy: 37±0.3 °C
Mixing Unit Non-touch vortexer mixing

Cuvette Loading and Waste Collection

Cuvette Disposable plastic cuvette
Cuvette Loading 88 cuvettes per tray,
2 trays can be loaded in one batch,
continuous loading and offloading
Waste Collection Waste container, 200 cuvettes per box

Working Conditions

Power Supply 110V/115V~, 60Hz; 220V-240V~, 50Hz;
220V/230V~, 60Hz
Input Power 1000VA
Operating Temperature 15~30 °C
Relative Humidity 35%RH~85%RH, without condensation
Dimension 860mm*740mm*560mm (W*D*H)
Weight 145Kg
Altitude Height -400m~3000m



CL-900i

Chemiluminescence Immunoassay Analyzer




SAPPHIRE BIOMED PVT. LTD.

Plot No. F.223, Phase 8-B, Industrial Area, Focal Point
S.A.S. Nagar (Mohali) Punjab 160055
Tel : 8729032690, 7018410419
Landline : 0172-3192233
Email : sapphirebiomed@gmail.com | Website : sapphirebiomed.com

mindray
healthcare within reach

CL-900i The right size for your lab

One of the world's smallest,
fully automated CLIA analyzers

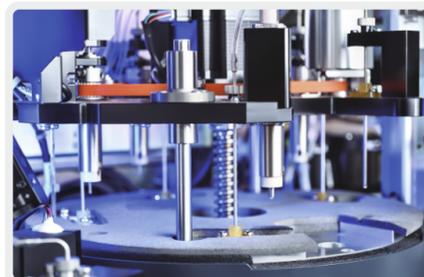

Precise magnetic separation with
consistent performance reliability




Solid-liquid waste separation
Environmental friendly



Wiper washing technology
Enhance efficiency and minimize carryover




One-key start
Extremely easy to use

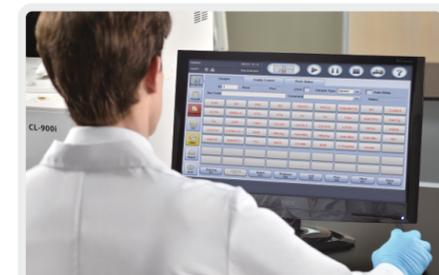

Intuitive software interface
Easy access to all functions



Continuously loading of
reagents and consumables

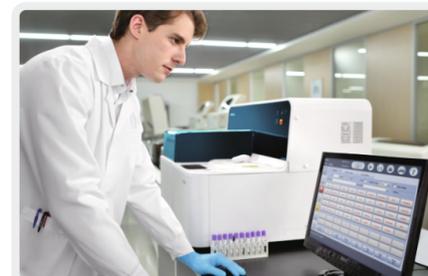

User maintenance free
Lighten the workload



Intelligent consumables management